

WIDEX MOMENT™ sRIC R D WITH V.2 RIC M-RECEIVER



The WIDEX sRIC R D is part of the WIDEX MOMENT™ family. Built around the WIDEX MOMENT™ platform to deliver better sound via TruAcoustics™ and the revolutionary Widex PureSound™ paradigm and all on a brand-new chip with greater connectivity.


The WIDEX sRIC R D overcomes the challenges of fitting open/vented fits for mild-to-moderate hearing loss with the Widex PureSound™ paradigm.

The sRIC is powered by a built-in lithium-ion battery and charged wirelessly by the matching sRIC charger or the Charge n Clean model.

WIDEX is offering a brand new design and hearing aid form factor in one-tone colors. App support is offered via the direct bluetooth connection to iOS and Android, which also enables connection to TV PLAY.

- Direct mobile wireless connectivity (2.4 GHz)
- Compatible with the DEX assistive listening devices
- 4 performance levels: 440/330/220/110
- Uses V.2 Easyware M-receiver
- Works with a physically smaller and more powerful receiver that covers a larger fitting range
- Powered by a lithium-ion rechargeable battery
- Hearing loss from mild-to-moderate
- Protection class IP68

SUGGESTED FITTING RANGE

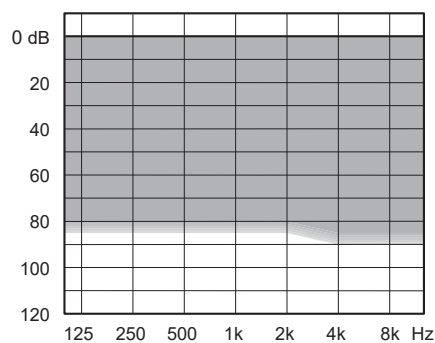

STANDARD TECHNOLOGY

- WIDEX MOMENT™ platform with Personal Gain Integrator and ZeroDelay™ Technology
- Widex PureSound™ — new paradigm in sound processing
- TruAcoustics™ for improved sound and fitting
- New Zen/Relax tones in the hearing aid.

KEY FEATURES	440	330	220	110
Performance	*****	*****	****	**
Processing and fine-tuning channels	15	12	10	6
Widex PureSound™ with ZeroDelay™ Technology	•	•	•	•
TruAcoustics™ with Personal Gain Integrator	•	•	•	•

CONNECTIVITY

2.4 GHz control (Android and iOS)	•	•	•	•
2.4 GHz audio streaming (iOS)*	•	•	•	•
WidexLink to DEX assistive listening devices**	•	•	•	•

APPS FOR iOS AND ANDROID

MOMENT App with SoundSense Learn	•	•	•	•
MOMENT App	•	•	•	•
TONELINK App	•	•	•	•
COM-DEX App	•	•	•	•


FEATURES

Adaptation manager	•	•	•	•
Fluid Sound Analyser (sound classes)	11 (IE)	7 (IE)	4	3
Programs	5	4	3	3
Smartwind Manager	•	•	•	•
High-frequency boost	•	•	•	•
Speech Enhancer RT	RT/IE	IE	•	•
Digital Pinna	•	•	•	•
HD Locator	•	•	•	•
TruSound Softener	•	•	•	•
SoundSense Adapt	•	•	•	•
Preference Control	•	•	•	•
Programmable Push Button***	•	•	•	•
Soft-level noise reduction	•	•	•	•
Noise Reduction	•	•	•	•
Zen/Relax	•	•	•	•
Audibility Extender	•	•	•	•


*Ready for direct Android streaming. **Also includes DEX assistive listening devices: TV-DEX, COM-DEX, RC-DEX, FM+DEX, TV-PLAY. ***Programmable: As a program button and an on/off switch, As a sound adjustment button and an on/off switch, As a dedicated on/off switch.

For more information on smartphone compatibility please visit www.widex.com/compatibility


MAXIMUM OUTPUT - EAR SIMULATOR

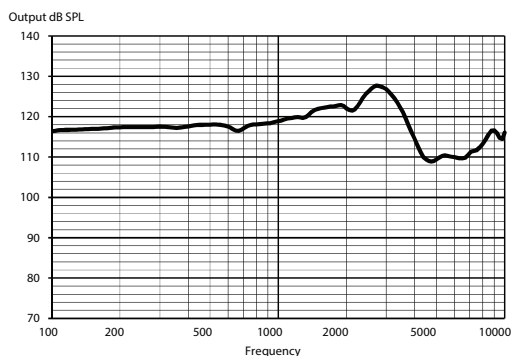


MAXIMUM OUTPUT - 2CC COUPLER

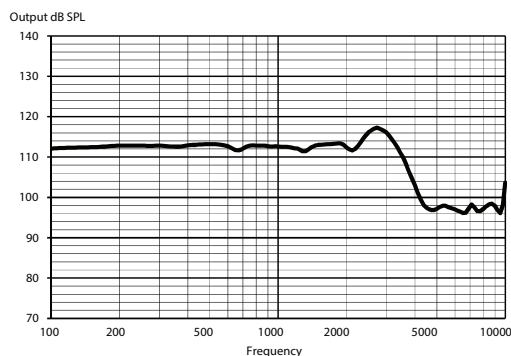

OUTPUT - EAR SIMULATOR

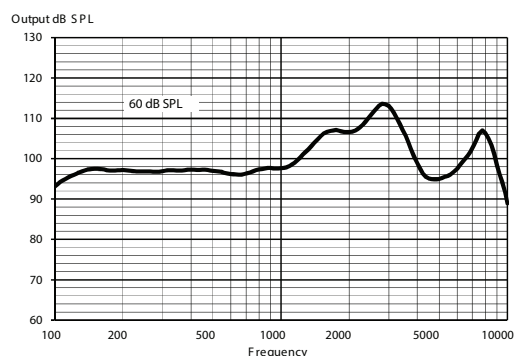

OUTPUT - 2CC COUPLER

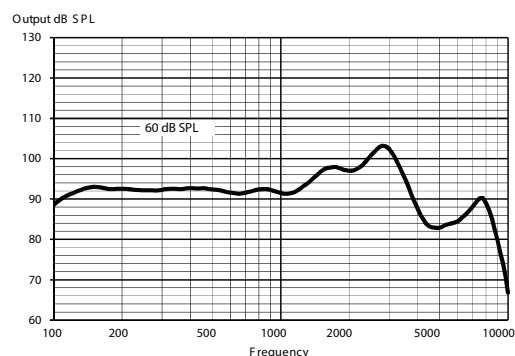

Technical data:

Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact Widex at global.widex.com.

		EAR SIMULATOR IEC 60118-0:1983 + A1:1994	2CC COUPLER IEC 60118-0:2015 , ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	122 dB SPL 128 dB SPL 120 dB SPL	113 dB SPL 117 dB SPL 114 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	107 dB SPL 114 dB SPL 100 dB SPL	98 dB SPL 103 dB SPL 97 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz Peak Average	67 dB 69 dB 64 dB	58 dB 61 dB 57 dB
Acoustic frequency range		100 Hz - 10000 Hz	100 Hz - 9200 Hz
Harmonic distortion (typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		19 dB SPL	20 dB SPL
Battery drain (standby)		1.18 mA	1.18 mA
Battery drain*		1.25 mA	1.28 mA
Battery life* Rechargeable lithium-ion battery		40 h	40 h
Mobile phone immunity (IEC 60118-13:2019 Ed. 5.0, ANSI C63.19:2019)		IEC: Bystander and User: In compliance	ANSI: In compliance

*Battery life in real-life situations depends among other things on the hearing aid features used and streaming time.

Do not modify this equipment without authorization of the manufacturer. Spare parts and instructions for correct repair can be acquired from Widex.